

## CSS-1301-213

Product type	<b>Capacitive proximity switches</b>
Rated operating distance sn	<b>15 mm</b>
Mounting	<b>Non-embeddable</b>
Supply voltage range UB	<b>10 ... 30 VDC</b>
Permissible ripple content	<b>≤ 5 % UB</b>
Output current	<b>≤ 2 x 200 mA</b>
No-load supply current	<b>≤ 8 mA</b>
LED	<b>Yellow</b>
Ambient temperature range TA	<b>-25 ... +70 °C</b>
Ambient temperature range TA US	<b>-13 ... 158 °F</b>
Short-circuit protection	<b>built-in</b>
Polarity reversal protection	<b>Built-in</b>
Degree of protection	<b>IP 67</b>
Housing material	<b>PPO</b>
Connection 1)	<b>Connector S12</b>
Connection	<b>Connector S12</b>
Setting range	<b>2 ... 25 mm</b>
Min. load current	<b>-</b>




**More information**  
**Doc PDF**

## Details

**Image**



**Drawing**

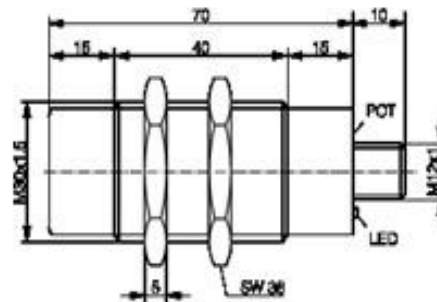

Travessa da Prelada, n.º 106 | 4250-379 Porto

GPS N41.169040 W8.630748

Tel: 228 305 348/422 | Tlm: 964 096 068 | Fax: 228305425

[www.sertequi.pt](http://www.sertequi.pt) | [geral@sertequi.pt](mailto:geral@sertequi.pt)