

UTS-1180-329

Product type	Ultrasonic proximity switch
Sensing range sd	60 ... 300 mm
Hysteresis	10 mm
Repeat Accuracy	+/- 2 mm
Rated Ultrasonic Frequency	400 kHz
Standard target	10 x 10 mm
Supply voltage range UB	12 ... 30 VDC (12 ... 20 V, approx. 20% reduced sensing range)
No-load supply current	≤ 50 mA
Ambient temperature range TA	-25 ... +70 °C
Degree of protection	IP 67
Housing material	Nickel-plated brass
Transducer Enclosure Material	PBTP (Crastin)
Setting range	80 ... 300 mm




**More information
Doc PDF**

Details

Image



Drawing

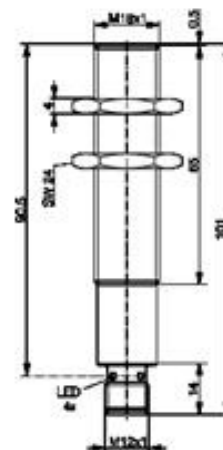

Travessa da Prelada, n.º 106 | 4250-379 Porto

GPS N41.169040 W8.630748

Tel: 228 305 348/422 | Tlm: 964 096 068 | Fax: 228305425

www.sertequi.pt | geral@sertequi.pt