


UTS-1181-303


Product type	Ultrasonic proximity switch
Sensing range sd	150 ... 1000 mm
Hysteresis	10 mm
Repeat Accuracy	+/- 2 mm
Rated Ultrasonic Frequency	200 kHz
Standard target	20 x 20 mm
Supply voltage range UB	12 ... 30 VDC (12 ... 20 V, approx. 20% reduced sensing range)
Output current	≤ 150 mA
No-load supply current	≤ 50 mA
Ambient temperature range TA	-25 ... +70 °C
Housing material	Nickel-plated brass
Transducer Enclosure Material	PBTP (Crastin)
Setting range	170 ... 1000 mm

Details

Image 



Drawing 

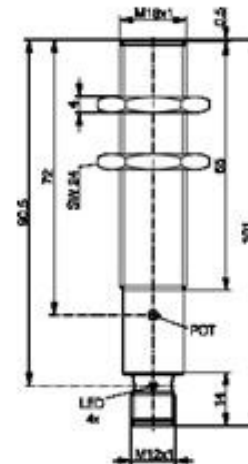

More information
Doc PDF